

12F Bunch Pigtail

FIBER OPTICA PATCH CORD/PIGTAIL




Overviews

Bunch fan-pigtail provide a stable and reliable connection for single mode fiber .PC,UPC and APC is optional .

Feature

- Low insertion loss
- high return loss
- High stability and reliability

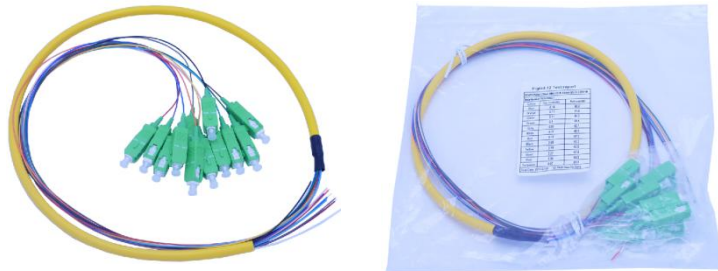

Specification

Parameter	Unit	Specification					
		FC/PC	FC/APC	SC/PC	SC/APC	ST/PC	LC/PC
Insertion Loss	dBm	<0.2					
Max. Insertion Loss	dB	<0.3					
Repeatability	nm	<0.1					
Changeability	dB	<0.2					
Return Loss		45	60	45	60	45	45
Operation Temperature	°C	-40~+80		-25~+70		-40~+80	
Storage Temperature	°C	-40~85					
Fiber type	um	Corning-SMF 28e 9/125um					
Core number		4,6,8,12 core					
Durability		>1000 times					
Industry Standard		Bellcore TA-NWT-001209					

Order Information

FPT ↓	-	SCA ↓	-	S ↓	-	SM ↓	-	2.0 ↓	-	2 ↓
Fiber Optical Bunch Pigtail		SCA=SC/APC SCP=SC/PC FCA=FC/APC FCP=FC/PC LCA=LC/APC LCP=LC/PC		S=Simplex D=Duplex		SM=Single model MM=Multimodel		0.25=250um 0.9=900um 2.0=2.0mm 3.0=30mm		0.5=0.5m 1=1m 1.5=1.5m 2=2m 3=3m

HONDAO reserves the right to change the design or specification at any time without notice.