

Overviews

SQM-B48-I 48 in 1 IP QAM modulator is Mux-scrambling-modulating all-in-one device . It has 48 multiplexing channels, 12 scrambling channels and 48 QAM (DVB-C) modulating channels, and supports maximum 1536 IP through the 3 GE ports and 48 non-adjacent carriers (50MHz~960MHz) output through the RF output interface. The device is characterized with dual RF output ports which broaden the bandwidth for QAM carriers.



Feature


- Max 1536 IP input thru 3 GE ports (SFP interface optional)
- Up to 512 PIDs remapping per output channel
- Supports 6 simulcrypt CAs and 12 scrambling channels
- 48 IP out over UDP/RTP/RTSP: IP 1~24 out thru Data1, IP 25~48 out thru Data2
- 48 non-adjacent QAM carriers output: carrier 1~24 out thru RF1, carrier 25~48out thru RF2
- Supports RS (204,188) encoding
- Supports accurate PCR adjusting/CA filtering, PID remapping and PSI/SI editing
- Web-based Network management

Specification

Item		Parameter	
Input	Input	Max 1536 IP in thru 3 GE ports [Data 1 & Data 2 bi-directional ports, Data port (located on front panel), each port can input max 512 IP] 100/1000M self-adaption Ethernet Port (SFP interface optional)	
	Transport Protocol	TS over UDP/RTP, unicast and multicast, IGMP V2/V3	
	Transmission Rate	Max 840Mbps for each GE input	
Mux	Input Channel	1536	
	Output Channel	48	
	Max PIDs Remapping	512 per output channel	
	Functions	PID remapping (auto/manually optional)	
		PCR accurate adjusting	
PSI/SI table automatically generating			
Scrambling Parameters	Max simulcrypt CA	6	
	Scramble Standard	ETR289, ETSI 101 197, ETSI 103 197	
	Scramble Channel	12	
	Connection	Local/remote connection	
Modulation Parameters	DVB-C Modulator Section	J.83A	Constellation :16/32/64/128/256QAM Bandwidth :8M
		J.83B/C	Constellation :64/256QAM Bandwidth :6M
	QAM Channel	48 non-adjacent carrier	
	Modulation Standard	EN300 429/ITU-T J.83A/B/C	
	Symbol Rate	3600~7000Ksps, 1ksps stepping 5057Ksps (J.83B, 64QAM) 5361Ksps (J.83B, 256QAM)	
	Constellation	16, 32, 64 , 128, 256QAM	
	FEC	RS (204, 188)	

RF Output	Interface	2 F type output ports for 48 carriers, 75Ω Carrier 1~24 out thru RF1, 25~48 thru RF2
	RF Range	50~960MHz, 1kHz stepping
	Output Level	-20dBm~+10dBm(87~117dbμV), 0.1dB stepping
	MER	≥ 40dB
TS output	48 IP output over UDP/RTP/RTSP, unicast/multicast, 2*100/1000M self-adaption, Ethernet Ports (SFP). IP 1~24 out thru Data1, IP 25~48 out thru Data2.	
System	Network management software (NMS) supporting	
General	Demission	420mm×440mm×44.5mm (W×L×H)
	Weight	3kg
	Temperature	0~45℃(operation), -20~80℃(storage)
	Power Supply	AC 100V±10%, 50/60Hz or AC 220V±10%, 50/60Hz
	Consumption	15.4W

Principle Chart

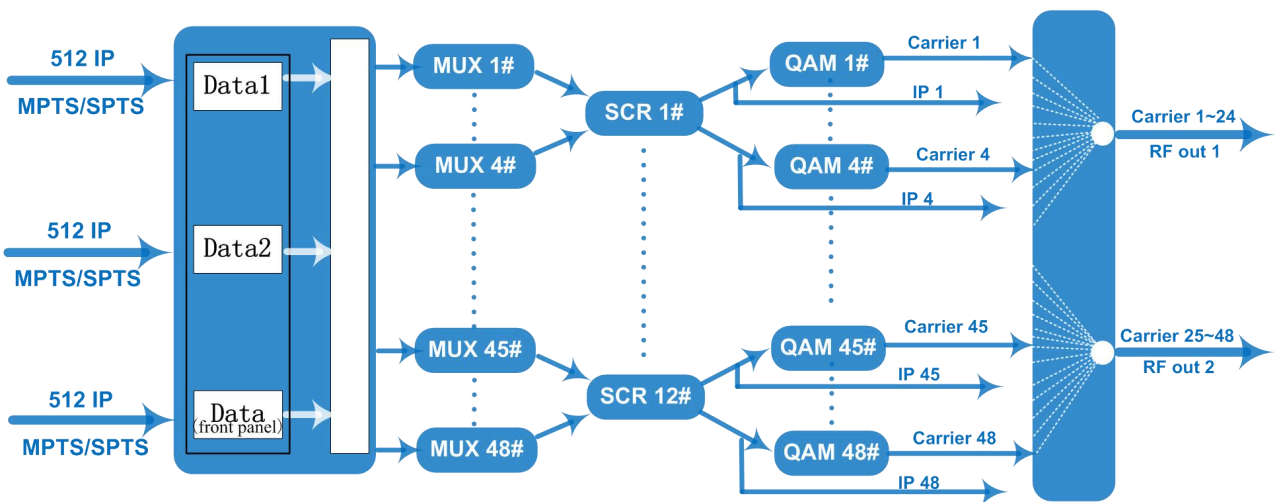

We produce a wide selection of network equipment under HONDAO brand. Gather thousands of products, which are supplier to customs of different field and different requirement. QC team test all goods before shipment. We screen the Chinese supplier in a search of the most efficient product solutions available to satisfy your individual needs.