

**DATASHEEET/JAN 2018** 

**Passive Optical Series** 

### **Overviews**

ODF-XX is used for connecting fiber and equipment of central Office. It is made of cold-rolled steel sheets by electrostatic plasticSpraying with proper structure and neatly looking. The cable can be Fixed by strengthening core in the terminal box, and its ports can be Replaced according to the plastical requirement. The panel on which Adapter is installed can be replaced optionally by FC, SC,ST,LC etc.





### **Feature**

- 2 cable fixer , easy to operate and convenient maintenance
- Front panels suitable for SC,FC,ST adapters
- 4U~8U height, 6~12 trays, 112~24 port
- Metal material box, OEM is welcome

## **Specification**


Parameter	Unit	Specification	
		ODF-XX	Core
Dimension	mm	483*270*1U	12 core
		483*270*2U	24 core
		483*270*3U	48 core
		483*270*4U	72 core
		483*270*5U	96 core
		483*270*8U	144 core
Tray	piece	1~12	
Color	dB	White or Black	
Operation	$^{\circ}$ C	-40~+60	



DATASHEEET/JAN 2018

**Passive Optical Series** 

# **Main Accessory**

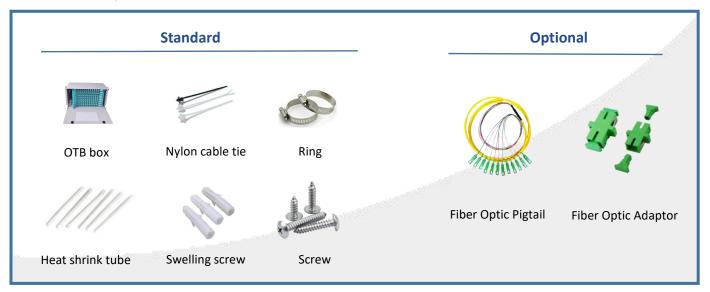

### **Order Information**

ODF -	<b>12</b> - ↓	<b>1U</b> ↓	- SCA ↓
Optical	12 = 12 core	<b>1</b> U	SCA=SC/APC
Distribution Frame	24 = 24 core	<b>2</b> U	SCP=SC/PC
	48 = 48 core	3U	FCA=FC/APC
	72 = 72 core	4U	FCP=FC/PC
	96 = 96 core		LCA=LC/APC
	144 = 144 core		LCP=LC/PC



We produce a wide selection of network equipment under HONDAO brand. Gather housands of products, which are supplier to customs of different filed and different requirement. QC team test all goods before shipment. We screen the Chinese supplier in a search of the most efficient product solutions available to satisfy your individual needs.