


Overviews

Patch cord/Pigtail . OEM

Feature

- Low insertion loss
- high return loss
- High stability and reliability

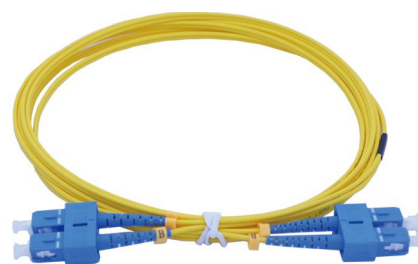

Specification

Parameter	Unit	Specification					
		FC/PC	FC/APC	SC/PC	SC/APC	ST/PC	LC/PC
Insertion Loss	dBm	<0.2					
Max. Insertion Loss	dB	<0.3					
Repeatability	nm	<0.1					
Changeability	dB	<0.2					
Return Loss		45	60	45	60	45	45
Operation Temperature	°C	-40~+80		-25~+70		-40~+80	
Storage Temperature	°C	-40~85					
Fiber type	um	Corning-SMF 28e 9/125um					
Core number		4,6,8,12 core					
Durability		>1000 times					
Industry Standard		Bellcore TA-NWT-001209					

Pactch cord

PC - SCA - SCA - S - SM - 3.0 - 3

PC= Patch Cord	SCA=SC/APC SCU=SC/UPC FCA=FC/APC LCA=LC/APC	SCA=SC/APC SCU=SC/UPC FCA=FC/APC LCA=LC/APC	S=Simplex D=Duplex	SM= Single Mode MM= Multi Mode	0.25=250um 0.9=900um 2.0=2.0mm 3.0=3.0mm	0.5=0.5m 1=1m 1.5m=1.5m 3=3m ...
----------------	--	--	-----------------------	-----------------------------------	---	--

Pigtail

PT - SC/APC - S - SM - 0.9 - 1.5

PT=Pigtail	SC/APC SC/UPC FC/APC LC/APC...	S=Simplex D=Duplex	SM= Single Mode MM= Multi Mode	0.25=250um 0.9=900um 2.0=2.0mm 3.0=3.0mm	0.5=0.5m 1=1m 1.5m=1.5m 3=3m...
------------	---	-----------------------	-----------------------------------	---	--