

Overviews

IPGW1601A Tuner to IP Gateway is a head-end interface conversion device which supports MPTS and SPTS output switchable. It supports 16 MPTS or 512 SPTS output over UDP and RTP/RTSP protocol. It is integrated with tuner demodulation (or ASI input) and gateway function, which can demodulate the signal from 16 tuners into IP package, or directly convert the TS from ASI input and tuner into IP package, then output the IP package through different IP address and ports. BISS function is also embedded for tuner input to descramble your tuner input programs.



Feature


- Support 16 FTA DVB- S/S2 (DVB-C/T/T2 /ISDB-T/ATSC-T optional)input, 2 ASI input
- Support BISS descrambling
- Support DisEqc function
- 16 MPTS or 512 SPTS output (MPTS and SPTS output switchable)
- 2 GE mirrored output, up to 850Mbps---SPTS
- 2 independent GE output port, GE1 + GE2---MPTS
- Support PID filtering, re-mapping (Only for SPTS output)
- Support “Null PKT Filter” function (For MPTS for output)
- Support Web operation

Specification

Item	Parameter
Input	Optional 1: 16 tuners input +2 ASI input---SPTS output Optional 2: 14 tuners input +2 ASI input --- MPTS output Optional 3: 16 tuners input --- MPTS output

Tuner Section	DVB-C	Standard	J.83A(DVB-C), J.83B, J.83C
		Frequency In	30 MHz~1000 MHz
		Constellation	16/32/64/128/256 QAM
	DVB-T/T2	Frequency In	30MHz ~999.999 MHz
		Bandwidth	6/7/8 M bandwidth
	DVB-S/S2	Input Frequency	950-2150MHz
		Symbol rate	DVB-S: QPSK 2~45Mbauds; DVB-S2:QPSK1~45Mbauds, 8PSK 2~30Mbauds
		Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10
		Constellation	QPSK, 8PSK
	ISDB-T	Input Frequency	30-1000MHz
ATSC-T	Input Frequency	54MHz~858MHz	
	Bandwidth	6M bandwidth	
Output	512 SPTS IP mirrored output over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast		
	16 MPTS IP output (for Tuner/ASI passthrough) over UDP and RTP/RTSP protocol through GE1 and GE2 port, Unicast and Multicast		
BISS Descrambling	Mode 1, Mode E (Up to 850Mbps) (descramble individual program)		

Principle Chart

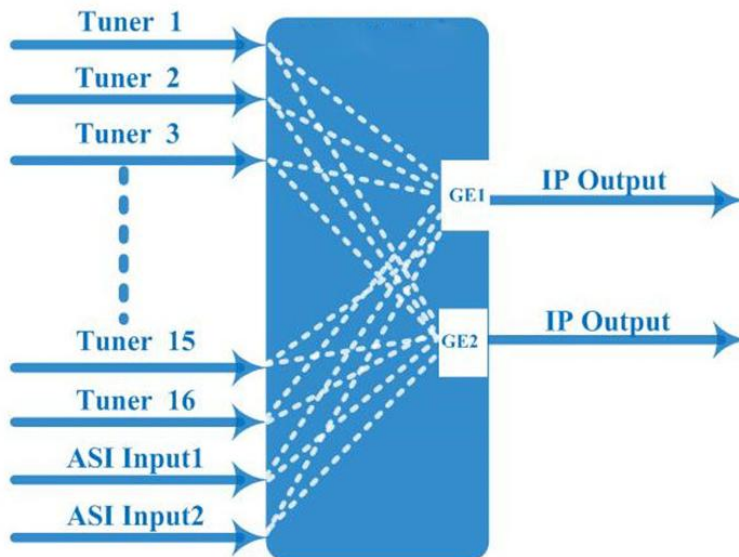

We produce a wide selection of network equipment under HONDAO brand. Gather thousands of products, which are supplier to customs of different filed and different requirement. QC team test all goods before shipment. We screen the Chinese supplier in a search of the most efficient product solutions available to satisfy your individual needs.